



Quick Reference Guide

Install Diver-Gate Driver – Windows 7

Introduction

The driver for the Diver-Gate(M) is not installed with Diver-Office. In most cases the driver will be automatically installed once the Diver-Gate(M) is connected to your computer. This may take a few minutes.

In case the driver is not installed automatically follow the steps below. This document outlines the most common workflow for Windows 7/Windows Vista for installing the drivers for the Diver-Gate(M).


Prerequisites

Download the Diver-Gate(M) drivers from:

- http://trials.swstechnology.com/software/Diver-Office/2016/Diver-Gate_Drivers_Setup.exe


Installation

1. Plug the USB cable into the Diver-Gate(M) and into a free USB port on the computer.
2. Turn on the Diver-Gate(M) and wait approximately 30 seconds until the Status light on the Diver-Gate(M) starts blinking.
3. Two things could happen:
 - a. Windows will show the following window. Click “Locate and install driver software (recommended)”. Go to step 4.

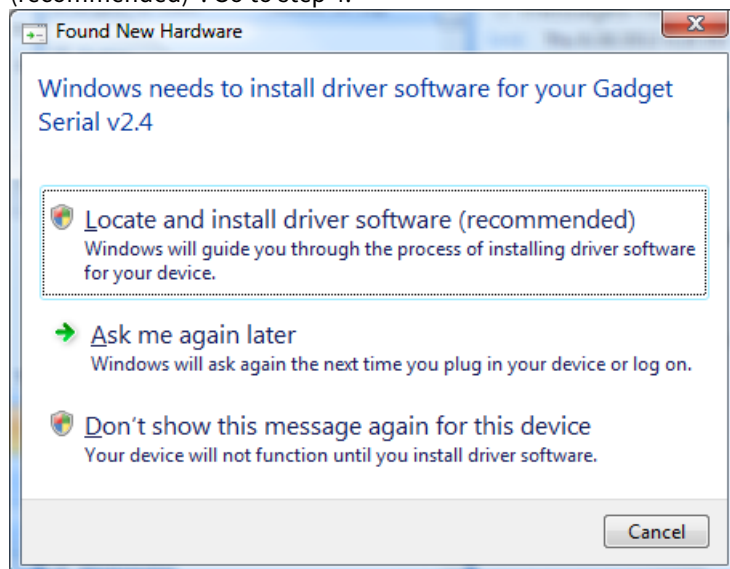




- b. Windows may try to install a driver. In that case, verify that the driver was installed successfully. To do so open the Device Manager and locate the Gadget Serial device in the list. If the Gadget Serial device icon has a small warning sign next to it, the driver is not correctly installed. Right-click on the Gadget Serial device and select **Properties** from the pop-up menu.

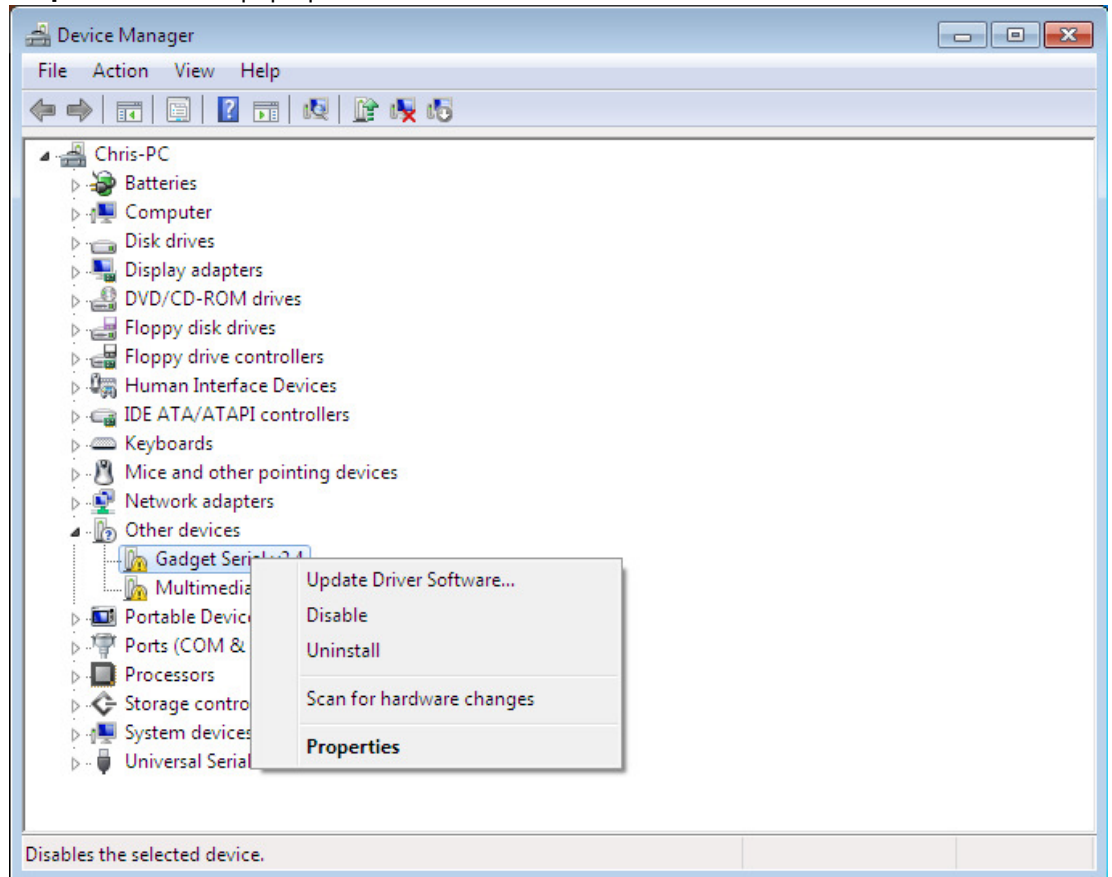




4. The following window will open. Select the option “Browse my computer for driver software”:

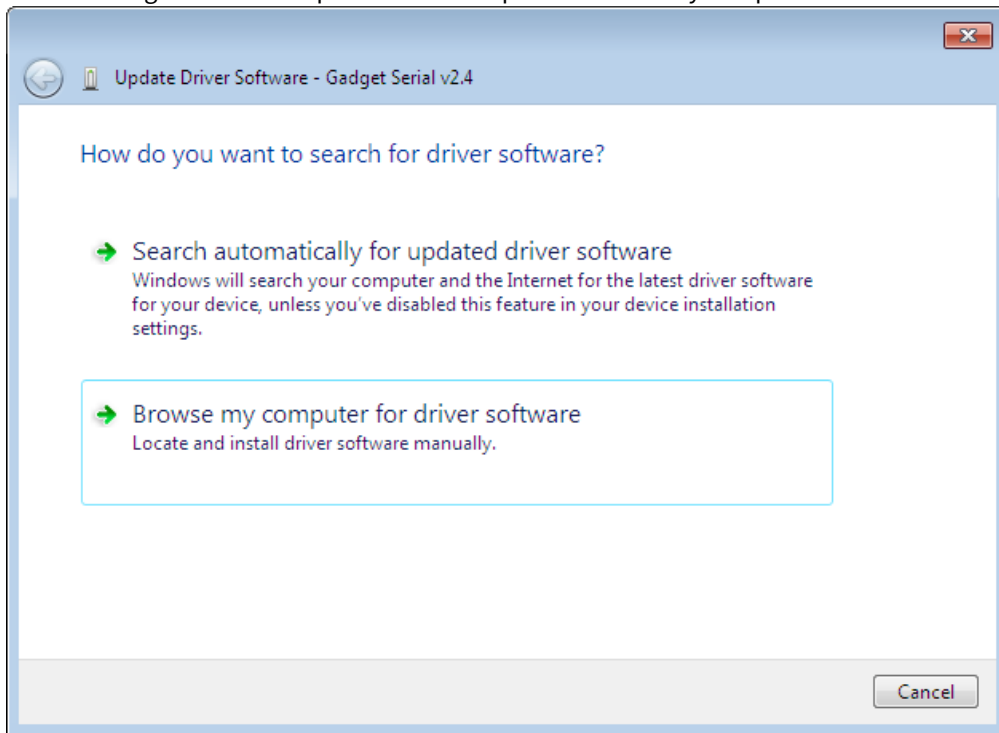


5. Browse to the location where the drivers are located:

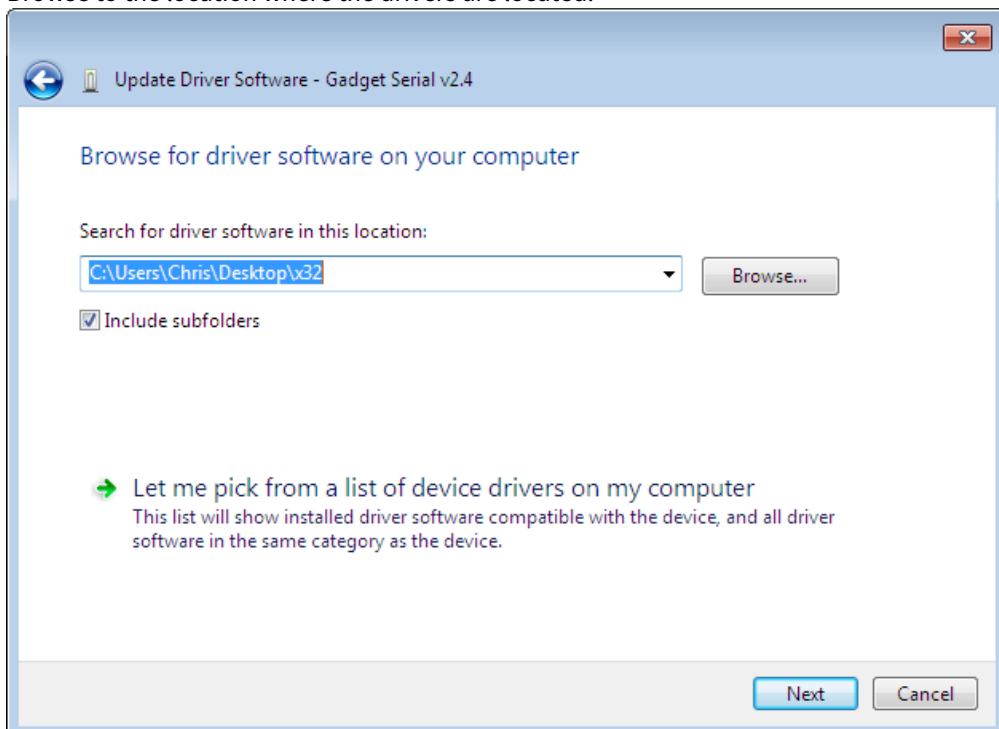



- The following warning message will appear during the installation. Click “Install this driver software anyway” to install the drivers for the Diver-Gate(M).

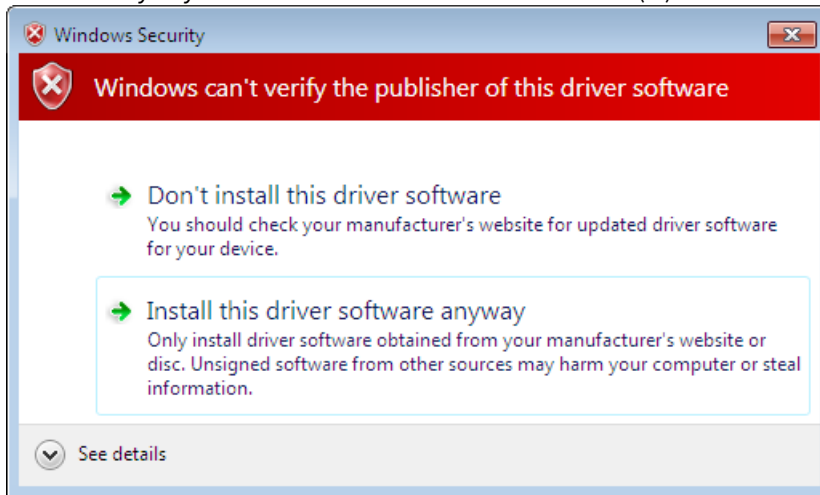

- The driver software will be installed and once the installation is finished the following message will appear. Click **Close** to finish the installation.

